



LA7286

VCR Audio Signal Recording and Playback Processor

Functions

- Equalizer amplifier
- Line amplifier
- Recording amplifier
- Recording bias current automatic adjustment circuit
- Ripple filter
- Mute
- ALC
- Recording/playback switch
- SP, LP, EP switch
- Tape head switch

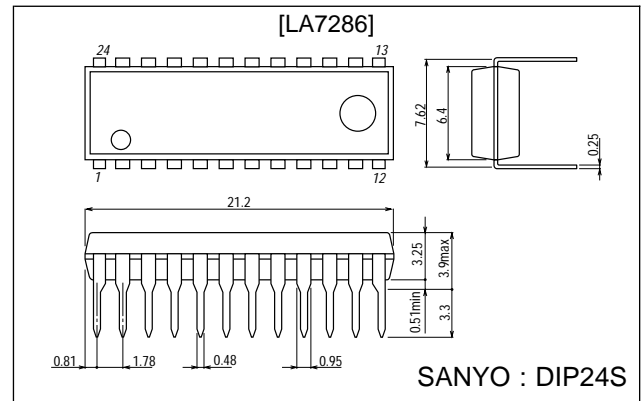
Features

- No adjustment of recording bias current required (due to adoption of automatic adjustment circuit).
- Recording bias oscillation circuit power supply switch on chip.
- Eliminates need for choke coil for recording equalizer.
- Playback amplifier equivalent input noise voltage: 1.0 μVrms .

Package Dimensions

unit : mm

3067-DIP24S



- Reduced capacitance (3.3 μF) of ALC detection capacitor.
- High withstand voltage head switch on chip.
- Supply voltage: 9 V and 12 V operation.

Specifications

Maximum Ratings at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CCmax}		14	V
Pin 2 input voltages	V_{IN2}	DC	± 65	Vp-p
Pin 2 input current	I_{IN2}		± 1.5	mA
Allowable power dissipation	P_{dmax}	$T_a \leq 65\text{ }^\circ\text{C}$	500	mW
Operating temperature	T_{opr}		-10 to +65	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Operating Conditions at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		9, 12	V
Operating supply voltage range	V_{CCop}		8.5 to 12.5	V

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.


SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LA7286

Test Circuit

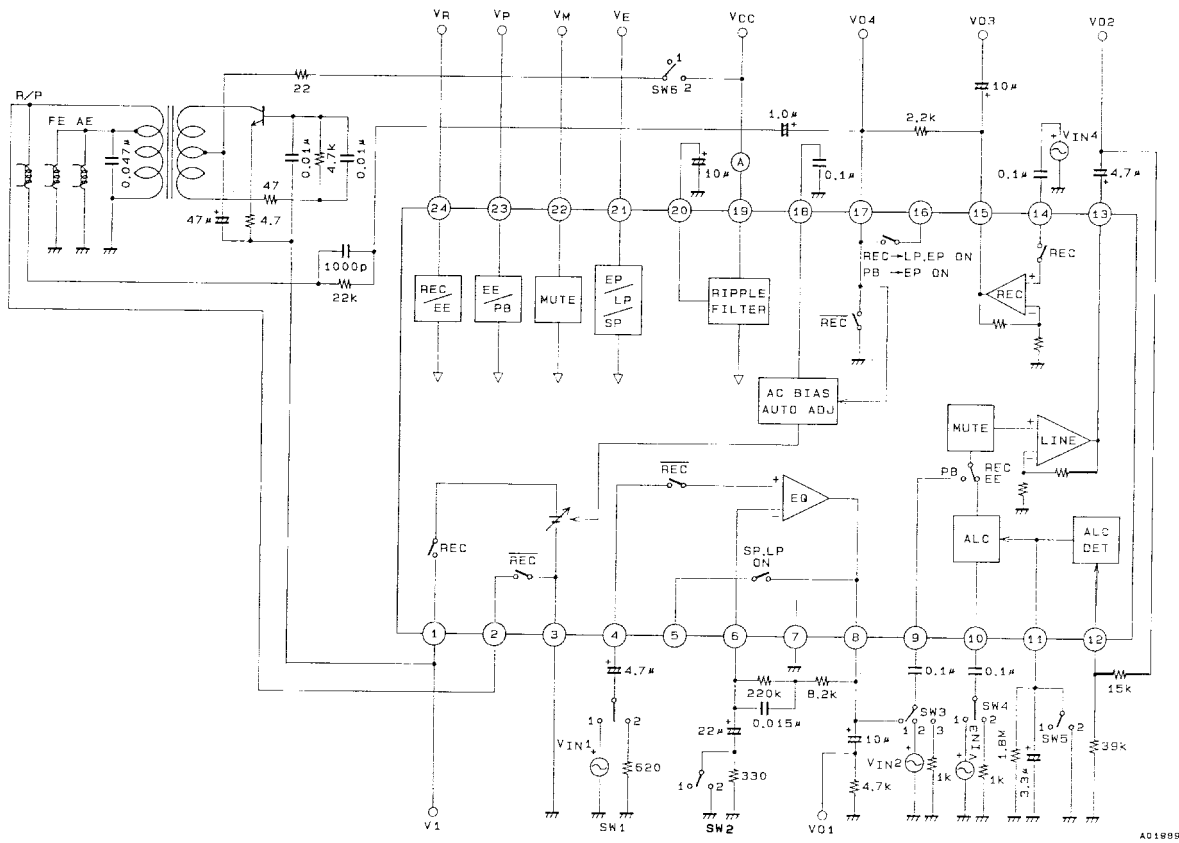Unit (resistance: Ω, capacitance: F)




Switch Operation Table

Test item (symbol)	SW1	SW2	SW3	SW4	SW5	SW6	V _M	V _P	V _R	Input	Measure:
I _{CCE}	2	1	3	2	2	1	GND	5 V	GND	—	I _O
I _{CCP}	2	1	3	2	2	1	GND	GND	GND	—	I _O
I _{CCR}	2	1	3	2	2	1	GND	5 V	5 V	—	I _O
V _{GOE}	1	2	3	2	2	1	GND	GND	GND	V _{IN1}	V _{O1}
V _{INE}	2	1	3	2	2	1	GND	GND	GND	—	V _{O1}
V _{GLP, THDL, V_{MOL}}	2	1	2	2	2	1	GND	GND	GND	V _{IN2}	V _{O2}
V _{GLR}	2	1	3	1	2	1	GND	5 V	GND	V _{IN3}	V _{O2}
V _{ONL}	2	1	3	2	2	1	GND	5 V	GND	—	V _{O2}
V _{OA, ALC, THDA}	2	1	3	1	1	1	GND	5 V	GND	V _{IN3}	V _{O2}
V _{GR, THDR, V_{MOR}}	2	1	3	2	2	1	GND	5 V	5 V	V _{IN4}	V _{O3}
M _P	1	1	1	2	2	1	5 V	GND	GND	V _{IN1}	V _{O2}
M _E	2	1	3	1	2	1	5 V	5 V	GND	V _{IN3}	V _{O2}
V _{BIAS}	2	1	3	2	2	2	GND	5 V	5 V	—	V _{O4}
V _{CTL}	2	1	3	2	2	2	GND	5 V	5 V	—	V ₁

LA7286

Sample Application Circuit : Erase head series type

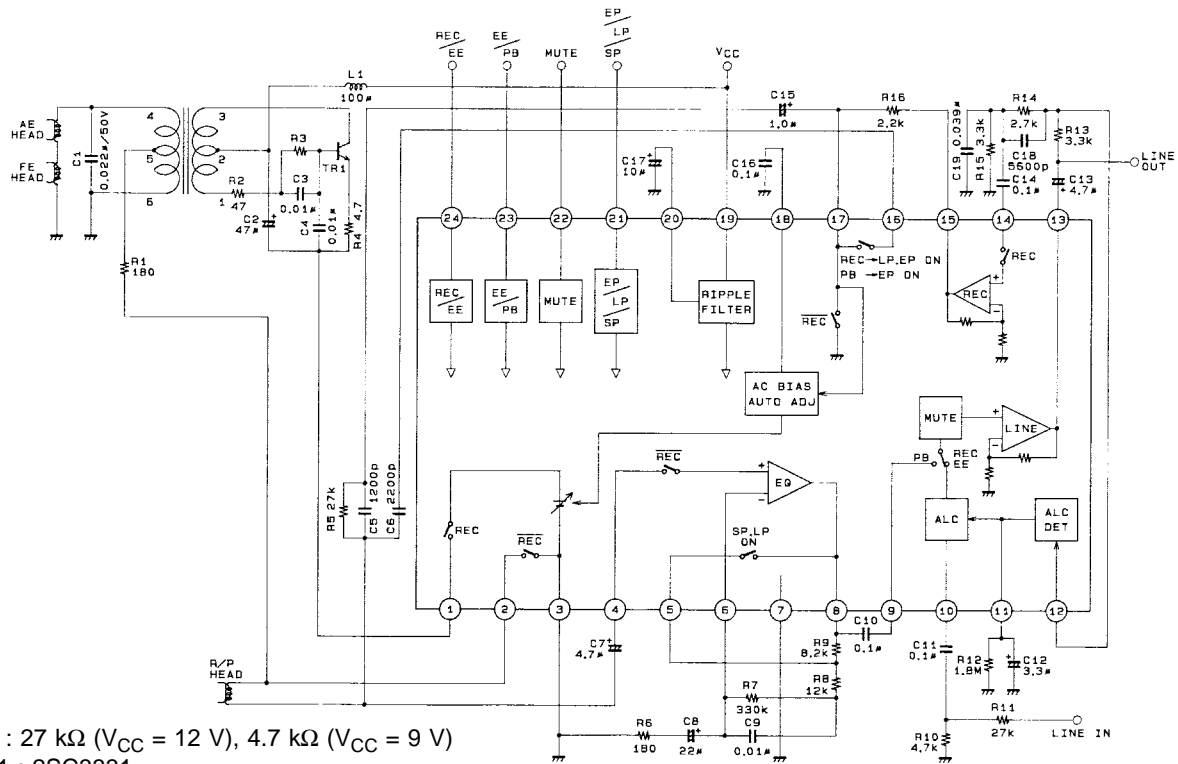Unit (resistance: Ω, capacitance: F)




- * R3 : 27 kΩ (V_{CC} = 12 V), 4.7 kΩ (V_{CC} = 9 V)
- * TR1 : 2SC3331

A01990

Sample Application Circuit : Erase head parallel type

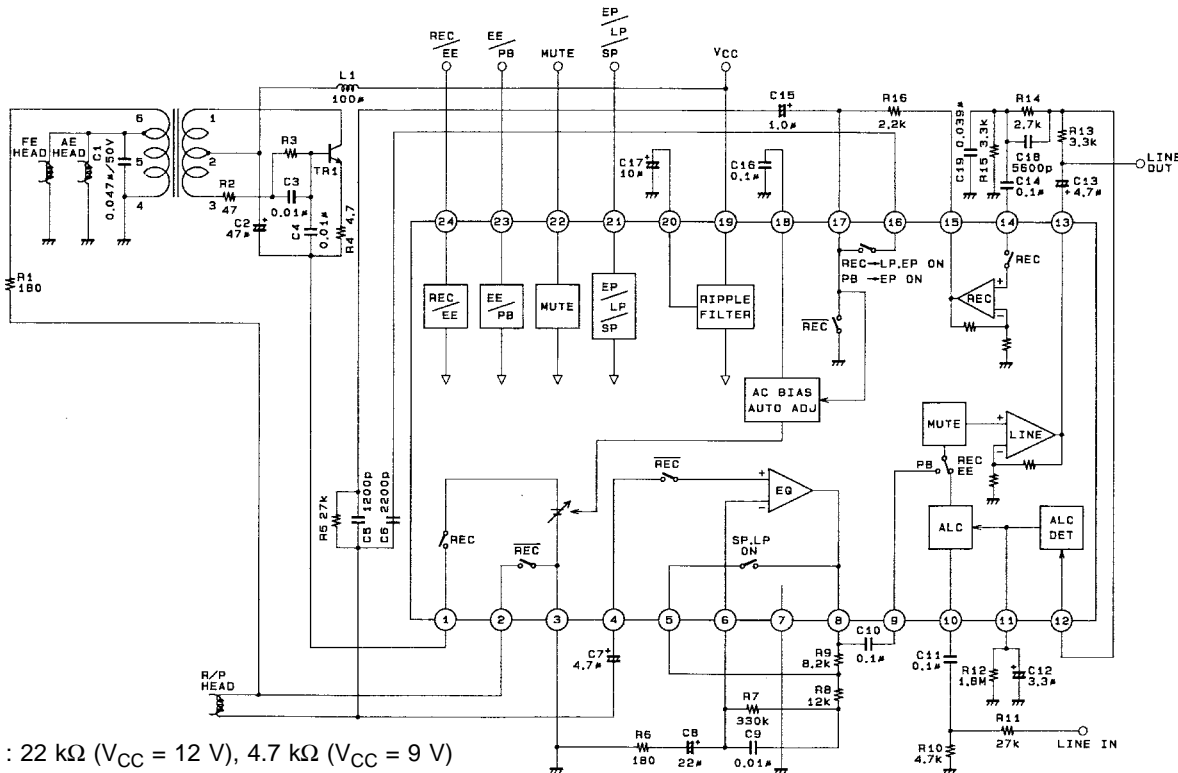Unit (resistance: Ω, capacitance: F)



- * R3 : 22 kΩ (V_{CC} = 12 V), 4.7 kΩ (V_{CC} = 9 V)
- * TR1 : 2SC3331

A01991

LA7286

Pin Functions

Unit (resistance: Ω)

Pin No.	Function name	Internal circuit for pin	Description of function
1	Recording bias automatic control output		EE, PB \rightarrow off REC \rightarrow control voltage
2	Head switch (high withstand voltage)		EE, PB \rightarrow on REC \rightarrow off On resistance \rightarrow 10 Ω (typ) Withstand voltage when off \rightarrow \pm 45 V (f = 80 kHz)
3	GND		GND for pin 2 head switch and Equalizer Amplifier only
4	EQ AMP input		Input impedance for playback signal input from head \rightarrow 120 k Ω (typ)
5	EQ switch 1		Switches the Playback Equalizer Amplifier high-region frequency voltage gain. LP, SP \rightarrow on EP \rightarrow off On resistance \rightarrow 20 Ω (typ)
6	EQ AMP NFB		Equalizer Amplifier negative feedback pin
7	GND		GND for all circuit blocks except the pin 2 head switch and Equalizer Amplifier

Continued on next page.

LA7286

Continued from preceding page.

Unit (resistance: Ω)







Pin No.	Function name	Internal circuit for pin	Description of function
8	EQ AMP output	<p style="text-align: right;">A01995</p>	Output impedance \rightarrow 50 Ω (typ)
9	LINE AMP PB input	<p style="text-align: right;">A01997</p>	Inputs the playback signal from the Equalizer Amplifier. Because the input impedance is as high as 120 k Ω , a 0.1 μ F ceramic capacitor can be used for the coupling capacitor on pin 9.
10	LINE AMP LINE input	<p style="text-align: right;">A01998</p>	Inputs EE and REC signals. <p style="text-align: right;">A01999</p> <p>The reference input is set by resistors R1 and R2. The amplifier gain is fixed at 21.5 dB. In addition, because the input impedance is as high as 120 kΩ, a 0.1 μF ceramic capacitor can be used for the coupling capacitor on pin 10.</p>
11	ALC FILTER	<p style="text-align: right;">A02000</p>	Wave detection is performed when connected to GND through a capacitor. In addition, the attack and recovery time is set by the C and R time constants.
12	ALC input wave detection	<p style="text-align: right;">A02001</p>	<p style="text-align: right;">A02002</p> <p>Inputs the Line Amplifier output signal. The ALC level is set by the resistors R1 and R2.</p>

Continued on next page.

LA7286

Continued from preceding page.

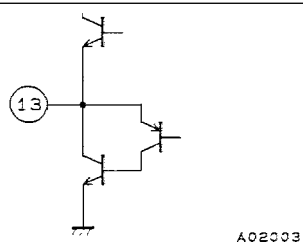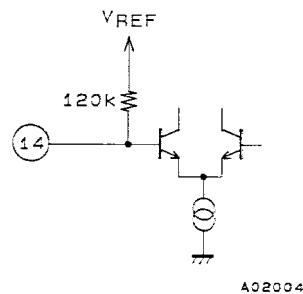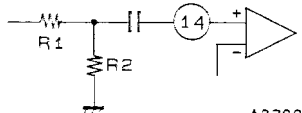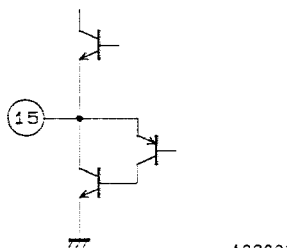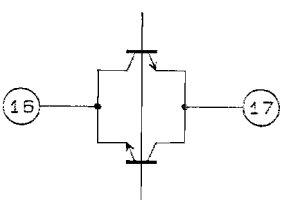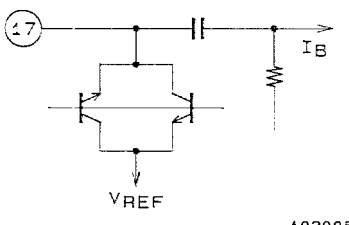Unit (resistance: Ω)







Pin No.	Function name	Internal circuit for pin	Description of function												
13	LINE AMP output	 <p style="text-align: right; font-size: small;">A02003</p>	Output impedance \rightarrow 50 Ω (typ)												
14	REC AMP input	 <p style="text-align: right; font-size: small;">A02004</p>	<p>Inputs the recording signal from Line Amplifier.</p>  <p style="text-align: right; font-size: small;">A02005</p> <p>The recording current is set by the resistors R1 and R2. In addition, because the input impedance is as high as 120 kΩ, a 0.1 μF ceramic capacitor can be used for the coupling capacitor on pin 14.</p>												
15	REC AMP output	 <p style="text-align: right; font-size: small;">A02005</p>	Output impedance \rightarrow 50 Ω (typ)												
16	EQ switch 2	 <p style="text-align: right; font-size: small;">A02007</p>	<p>Switches the high-region peaking frequency during recording and playback.</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse; text-align: center;"> <thead> <tr> <th></th> <th>REC</th> <th>PB</th> </tr> </thead> <tbody> <tr> <td>EP</td> <td>On</td> <td>On</td> </tr> <tr> <td>LP</td> <td>On</td> <td>Off</td> </tr> <tr> <td>SP</td> <td>Off</td> <td>Off</td> </tr> </tbody> </table> <p>On resistance \rightarrow 30 Ω (typ)</p>		REC	PB	EP	On	On	LP	On	Off	SP	Off	Off
	REC	PB													
EP	On	On													
LP	On	Off													
SP	Off	Off													
17	Recording bias automatic control input and PB switch.	 <p style="text-align: right; font-size: small;">A02008</p>	<p>EE, PB \rightarrow on REC \rightarrow off On resistance \rightarrow 20 Ω (typ)</p>												



Continued on next page.

LA7286

Continued from preceding page.

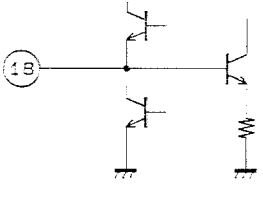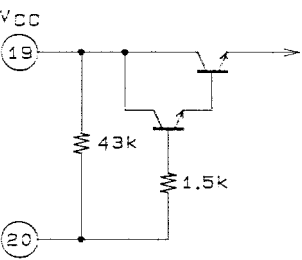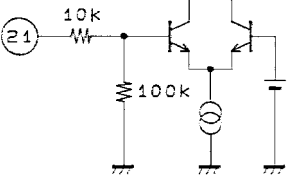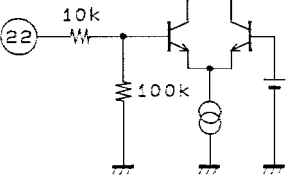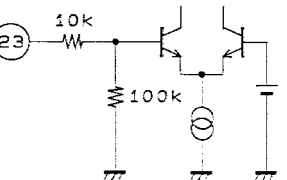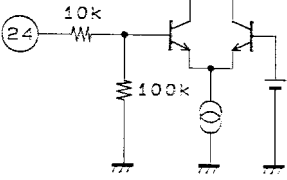Unit (resistance: Ω)

Pin No.	Function name	Internal circuit for pin	Description of function												
18	Recording bias automatic control filter	 <p style="text-align: right;">A02009</p>	Wave detection is performed when connected to GND through a capacitor.												
19	Supply voltage (V_{CC})		V_{CC} max = 14 V V_{CC} = 8.5 V to 12.5 V												
20	Ripple filter	 <p style="text-align: right;">A02010</p>	Ripple rejection is performed when connected to GND through an electrolytic capacitor for the filter.												
21	EP/LP/SP Control	 <p style="text-align: right;">A02011</p>	<p>When the voltage on pin 21 is 3.6 V to 6.0 V: EP; when 1.8 V to 2.6 V: LP; when 0 V to 1.0 V: SP</p> <p>Switch On Pin Number</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>REC</th> <th>PB</th> </tr> </thead> <tbody> <tr> <td>EP</td> <td>16</td> <td>16</td> </tr> <tr> <td>LP</td> <td>16, 5</td> <td>5</td> </tr> <tr> <td>SP</td> <td>5</td> <td>5</td> </tr> </tbody> </table>		REC	PB	EP	16	16	LP	16, 5	5	SP	5	5
	REC	PB													
EP	16	16													
LP	16, 5	5													
SP	5	5													
22	MUTE Control	 <p style="text-align: right;">A02012</p>	<p>When the voltage on pin 22 is 2.5 V to 6.0 V: MUTE on; when 0 V to 1.5 V: MUTE off</p>												
23	EE/PB Control	 <p style="text-align: right;">A02013</p>	<p>When the voltage on pin 23 is 3.0 V to 6.0 V: EE; when 0 V to 1.0 V: PB</p>												
24	REC/EE Control	 <p style="text-align: right;">A02014</p>	<p>When the voltage on pin 24 is 3.0 V to 6.0 V: REC; when 0V to 1.0 V: EE</p> <p>However, REC mode is entered only when the voltage on pin 23 is 3.0 V to 6.0 V.</p>												

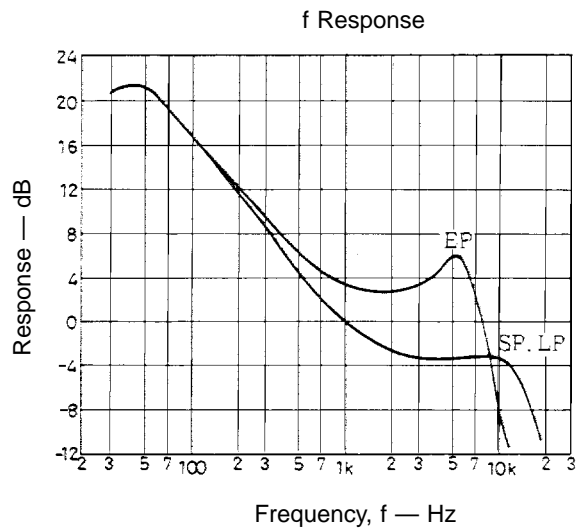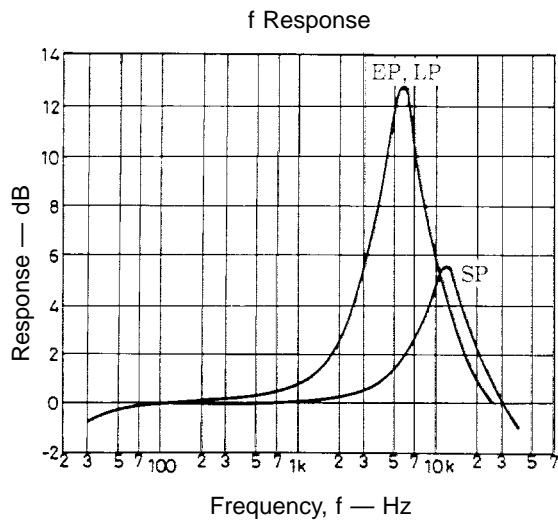

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1995. Specifications and information herein are subject to change without notice.