



Circuit diagram

Cell(电芯):	LP403048	Date code(喷码):	Inner controlling standard(内控标准)		
Battery Specification (电池参数)	Min. Capacity 最低容量 (mAh) (0.2C, 25±3°C) *Single battery capacity (单体电池容量)	520	*PCM protection (保护板参数)	Overcurrent Detection(A) (过流值)	2-6A
	Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) *Single battery capacity (单体电池容量)	560		Overcharge Detection Voltage(V) (过充保护电压)	4.3
	Nominal Voltage 标称电压 (V)	3.7	Ambient Conditions (工作环境)	Overdischarge Detection Voltage(V) (过放保护电压)	2.4
	Internal impedance 内阻(≦) (mΩ, AC 1KHZ)	250		Charge Temp. 充电温度 (°C)	0-45
			Discharge Temp. 放电温度 (°C)	-20-60	
			Humidity(湿度)	65±20%	

Remark(备注):
 1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
 2. Rohs compliant(严格按照ROHS要求生产).

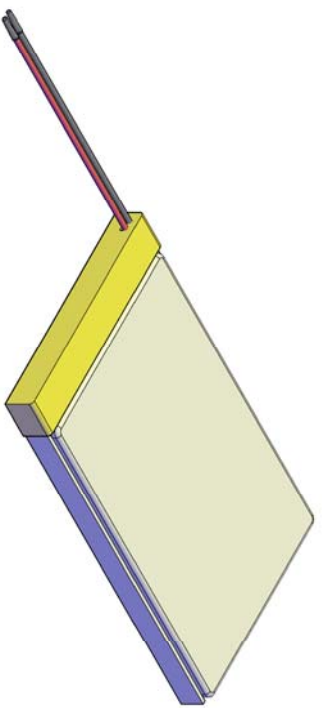

Title	LP403048-PCM-LD	Drawn:	WeiBo	Revise No.:	E4-2009
File NO.	A01588	Checked 1:	Jane	Projection:	
		Checked 2:	Keyan	Page:	1/1
		Approved:		Scale:	1.2 : 1
		Draw Date:	10/01/22	Unit:	mm