


- POWER AMPLIFIER
- FLYBACK GENERATOR (105V PEAK)
- THERMAL PROTECTION
- CURRENT LIMITED TO GND

DESCRIPTION

Designed for Monitors and high performance TVs, the TDA8179 vertical deflection booster delivers fly-back voltages up to 105V.

The TDA8179 operates with supplies up to 50V and provides up to 2App output current to drive to yoke.


The TDA8179 is offered in HEPTAWATT package.



HEPTAWATT

ORDER CODE : TDA8179


BLOCK DIAGRAM

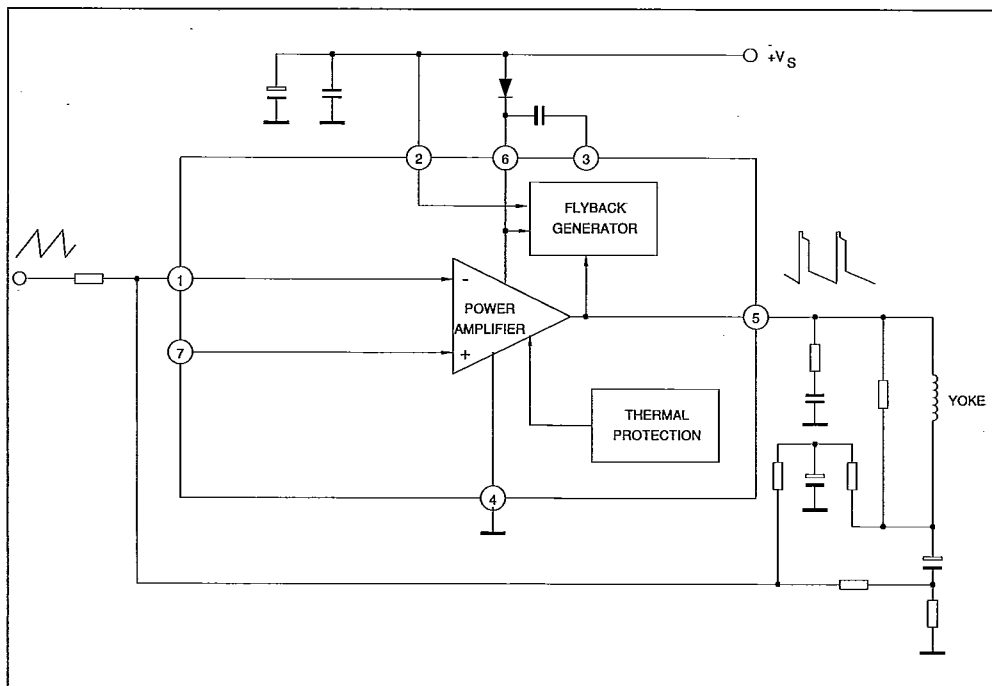


PIN CONNECTION (top view)

S G S-THOMSON

30E D

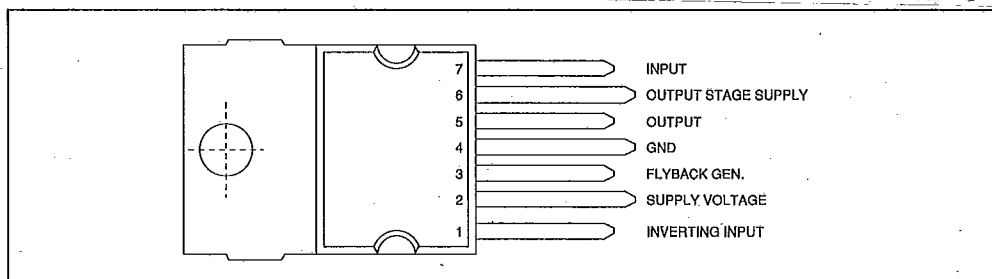

APPLICATION CIRCUIT

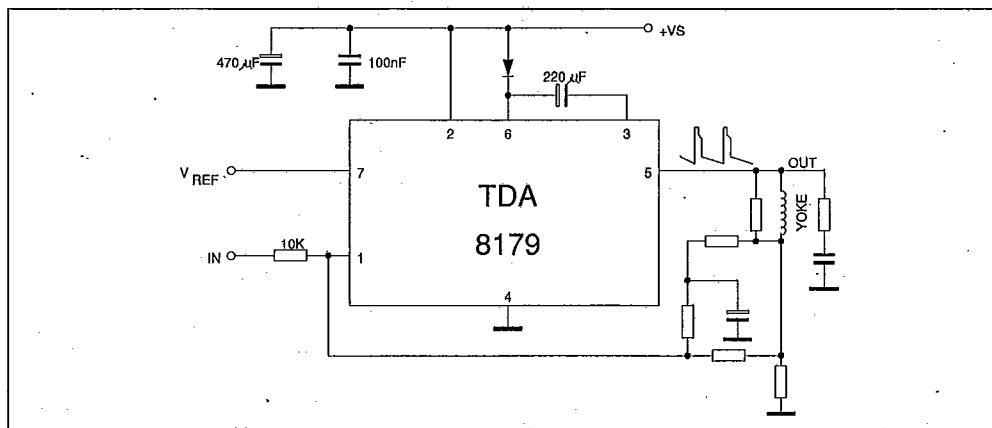

S G S-THOMSON

30E D

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_s	Supply Voltage (pin 2)	50	V
V_5, V_6	Flyback Peak Voltage	105	V
V_1, V_7	Amplifier Input Voltage	+ V_s	
I_O	Output Peak Current (non repetitive, $t = 2\text{ms}$)	2	A
I_O	Output Peak Current at $f = 50$ or 60Hz $t \leq 10\mu\text{s}$	2	A
I_O	Output Peak Current at $f = 50$ or 60Hz $t > 10\mu\text{s}$	1.8	A
I_3	Pin 3 DC at $V_5 < V_2$	100	mA
I_3	Pin 3 Peak Flyback Current at $f = 50$ or 60Hz , $t_{fly} \leq 1.5\text{ms}$	1.8	A
P_{tot}	Total Power Dissipation at $T_{case} = 70^\circ\text{C}$	20	W
T_{stg}	Storage Temperature	- 40 to 150	$^\circ\text{C}$
T_j	Junction Temperature	0 to 150	$^\circ\text{C}$





THERMAL DATA

$R_{th J-C}$	Junction-case Thermal Resistance	Max	4	$^\circ\text{C/W}$
--------------	----------------------------------	-----	---	--------------------

ELECTRICAL CHARACTERISTICS

(V₇ = 2.2V, V_s = 48V, T_{amb} = 25°C, unless otherwise specified) (refer to the test circuits)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_s	Operating Supply Voltage Range		10		48	V
I_2	Pin 2 Quiescent Current	$I_3 = 0$ $I_5 = 0$		10	20	mA
I_6	Pin 6 Quiescent Current	$I_3 = 0$ $I_5 = 0$		20	40	mA
I_1	Amplifier bias Current	$V_1 = 1\text{V}$		- 0.2	- 1	μA
V_{3L}	Scanning Voltage	$I_3 = 20\text{mA}$		1.3	1.8	V
V_5	Quiescent Output Voltage	$V_s = 48\text{V}$ $R_a = 3.9\text{K}\Omega$		24.2		V
		$V_s = 35\text{V}$ $R_a = 5.6\text{K}\Omega$		17.5		
V_{5L}	Output Saturation Voltage to GND	$I_5 = 1\text{A}$		1.2	1.5	V
V_{5H}	Output Saturation Voltage to Supply	- $I_5 = 1\text{A}$		2.2	2.8	V
V_{D5-6}	Diode Forward Voltage between Pins 5-6	$I_D = 1\text{A}$		1.5		V
V_{D3-2}	Diode Forward Voltage between Pins 3-2	$I_D = 1\text{A}$		1.5		V
R_1	Input Resistance			200		$\text{K}\Omega$
T_j	Junction Temperature for Thermal Shutdown			140		$^\circ\text{C}$

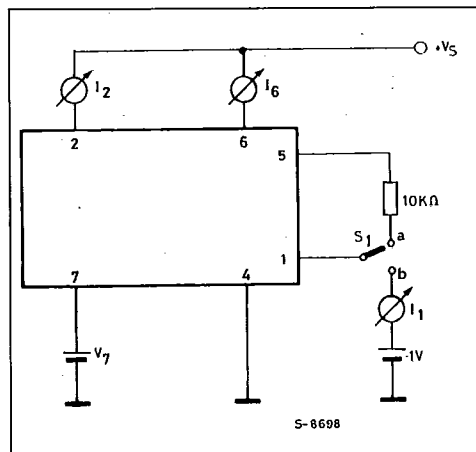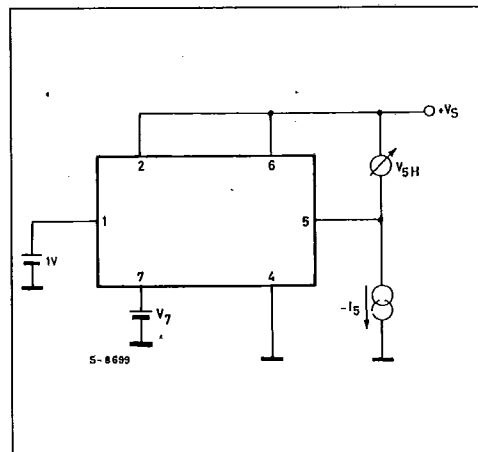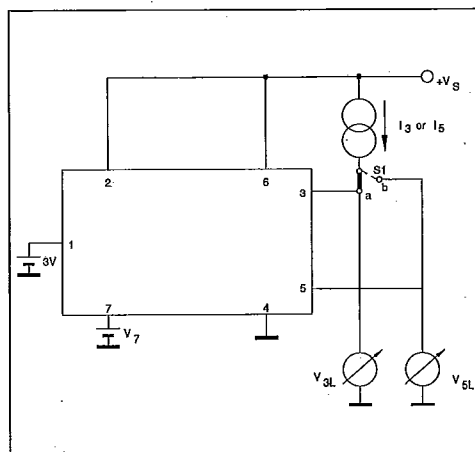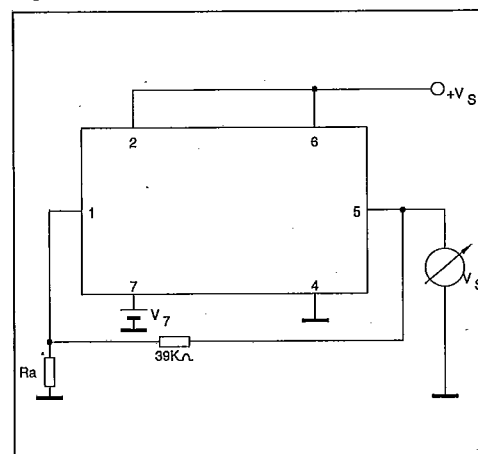Figure 1 : DC Test Circuits.**Figure 1a : Measurement of I_1 ; I_2 ; I_6 .**S1 : (a) I_2 and I_6 ; (b) I_1 .**Figure 1b : Measurement of V_{5H} .****Figure 1c : Measurement of V_{3L} ; V_{5L} .**S1 : (a) V_{3L} ; (b) V_{5L} .**Figure 1d : Measurement of V_5 .**

SGS-THOMSON

30E D

Figure 2 : SOA of Each Output Power Transistor at 25°C amb.

