

SS8550


PNP EPITAXIAL SILICON TRANSISTOR

2W OUTPUT AMPLIFIER OF PORTABLE RADIO IN CLASS B PUSH-PULL OPERATION.

- Complimentary to SS8050
- Collector Current: $I_C = -1.5A$
- Collector Dissipation: $P_C = 2W$ ($T_C = 25^\circ C$)

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	-40	V
Collector-Emitter Voltage	V_{CE0}	-25	V
Emitter-Base Voltage	V_{EB0}	-6	V
Collector Current	I_C	-1.5	A
Collector Dissipation	P_C	1	W
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature	T_{STG}	-65 ~ 150	$^\circ C$

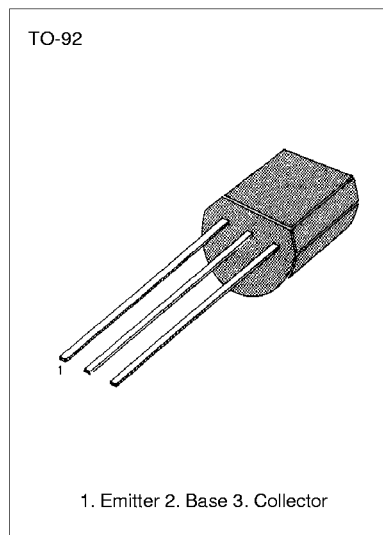


ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ C$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	BV_{CB0}	$I_C = -100\mu A, I_E = 0$	-40			V
Collector-Emitter Breakdown Voltage	BV_{CE0}	$I_C = -2mA, I_B = 0$	-25			V
Emitter-Base Breakdown Voltage	BV_{EB0}	$I_E = -100\mu A, I_C = 0$	-6			V
Collector Cut-off Current	I_{CBO}	$V_{CB} = -35V, I_E = 0$			-100	nA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -6V, I_C = 0$			-100	nA
DC Current Gain	h_{FE1}	$V_{CE} = -1V, I_C = -5mA$	45	170		
	h_{FE2}	$V_{CE} = -1V, I_C = -100mA$	85	160	300	
	h_{FE3}	$V_{CE} = -1V, I_C = -800mA$	40	80		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -800mA, I_B = -80mA$		-0.28	-0.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = -800mA, I_B = -80mA$		-0.98	-1.2	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = -1V, I_C = -10mA$		-0.66	-1.0	V
Output Capacitance	C_{OB}	$V_{CB} = -10V, I_E = 0$ $f = 1MHz$		15		pF
Current Gain-Bandwidth Product	f_T	$V_{CE} = -10V, I_C = -50mA$	100	200		MHz


$h_{FE(2)}$ CLASSIFICATION

Classification	B	C	D
$h_{FE(2)}$	85-160	120-200	160-300


STATIC CHARACTERISTIC

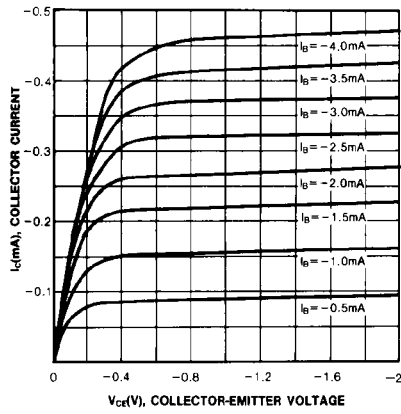


DC CURRENT GAIN

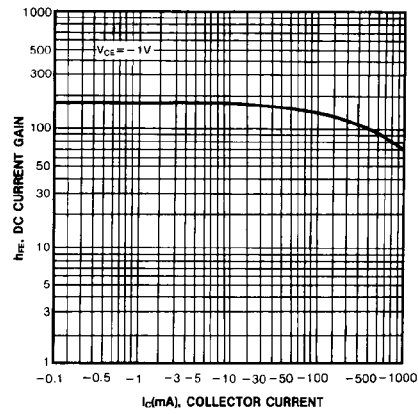


BASE-EMITTER ON VOLTAGE

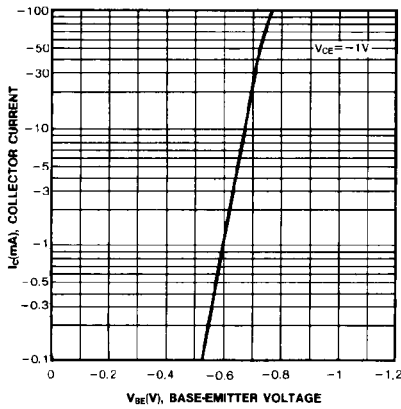

BASE-EMITTER SATURATION VOLTAGE
COLLECTOR-EMITTER SATURATION VOLTAGE

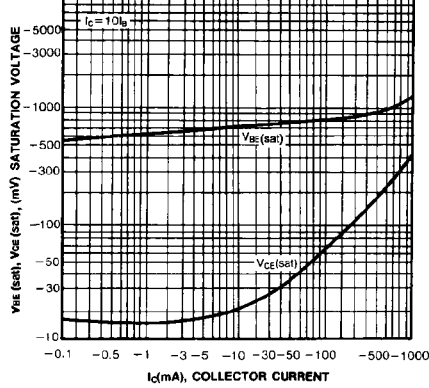

CURRENT GAIN-BANDWIDTH PRODUCT

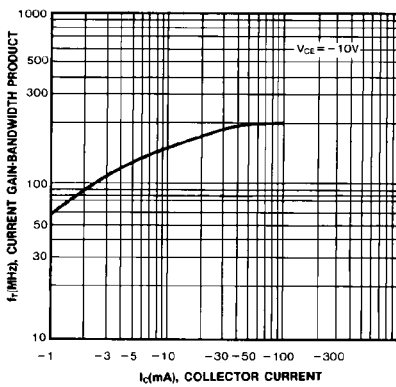

COLLECTOR OUTPUT CAPACITANCE

