



# Li-MnO<sub>2</sub> Battery

## ----CR123ASL Brief Datasheet----



### 1. BASIC SPECIFICATION

➤ Model:	CR123ASL
➤ Nominal Voltage:	3.0Volts
➤ Nominal Capacity:	(@10mA Discharge Current to 2.0V cut-off, +23°C) 1300mAh
➤ Standard Discharge Current:	10mA
➤ Maximum recommended current under continuous discharge:	2000mA
➤ Maximum recommended current under pulse discharge:	3000mA
➤ Operational temperature range:	-40°C ~ +70°C
➤ Nominal Weight:	20.0g

### 2. MAIN FEATURES

- Light Weight, High Voltage and High Energy Density
- Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics
- Outstanding Temperature Characteristics
- Excellent Leakage Resistance and Excellent Long-term Reliability

### 3. ELECTRICAL CHARACTERISTICS

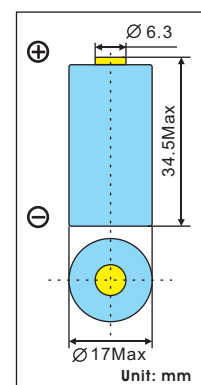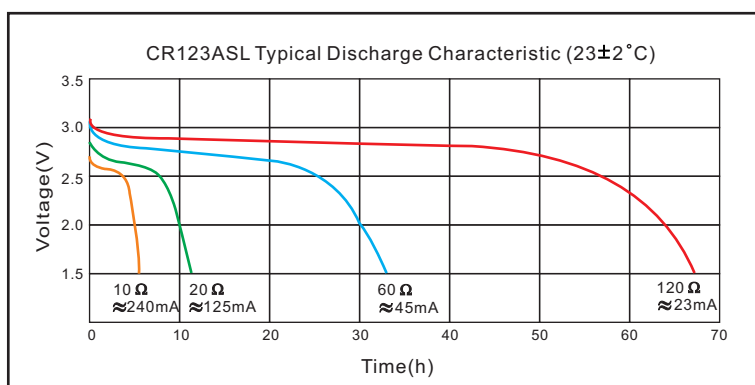

### 4. WARNING!

- DO NOT recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- Keep this battery out of the reach of children.
- When storing the battery or throwing it away, be sure to cover it with tape.